

SYSTEM **KAN-therm**

Install your future



EN 20/06

# Garden Tap




**frost resistant**



## Comfort and safety

- Unique design guarantees 100% resistance of the valve to water freezing
- Hygienic attestation by PZH
- Aesthetic nickel-plated dial

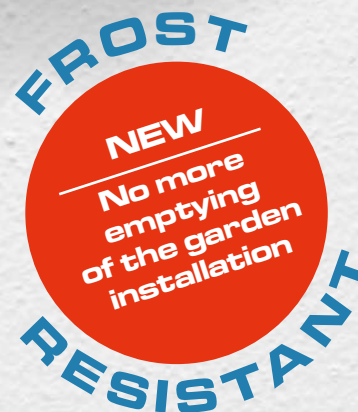


[www.kan-therm.com](http://www.kan-therm.com)

ISO 9001

# Application

The frost resistant garden valve is used in drinking water installations and should be installed on external walls from 100 to 478 mm thick. It is equipped with a 3/4" diameter thread for connection to a garden hose.

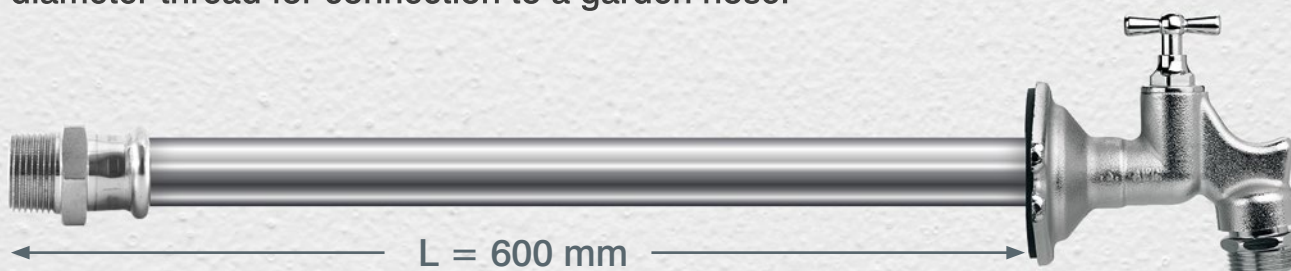

The valve is easy to install, thanks to the built-in self-clamping click connection. Thermal insulation is included.

## Advantages:

- Compact design
- For 100 mm to 478 mm thick walls
- Adjustable length of the valve pipe section
- Easy installation thanks to the integrated self-locking click connector
- 100% resistance to freezing
- Corrosion resistance
- PZH Certificate

## Materials:

Spout body	Chrome-plated brass
Cap	Glass-fibre reinforced polyamide
Pipe	Stainless steel
Flange	Glass-fibre reinforced polyamide
O-Ring	EPDM
Insulation	Foamed polyethylene

## Technical specification:

Connections – 3/4"


Maximum pressure – PN10

## Attests and approvals:



**KAN** Group  
e-mail: [kan@kan-therm.com](mailto:kan@kan-therm.com)

[www.kan-therm.com](http://www.kan-therm.com)

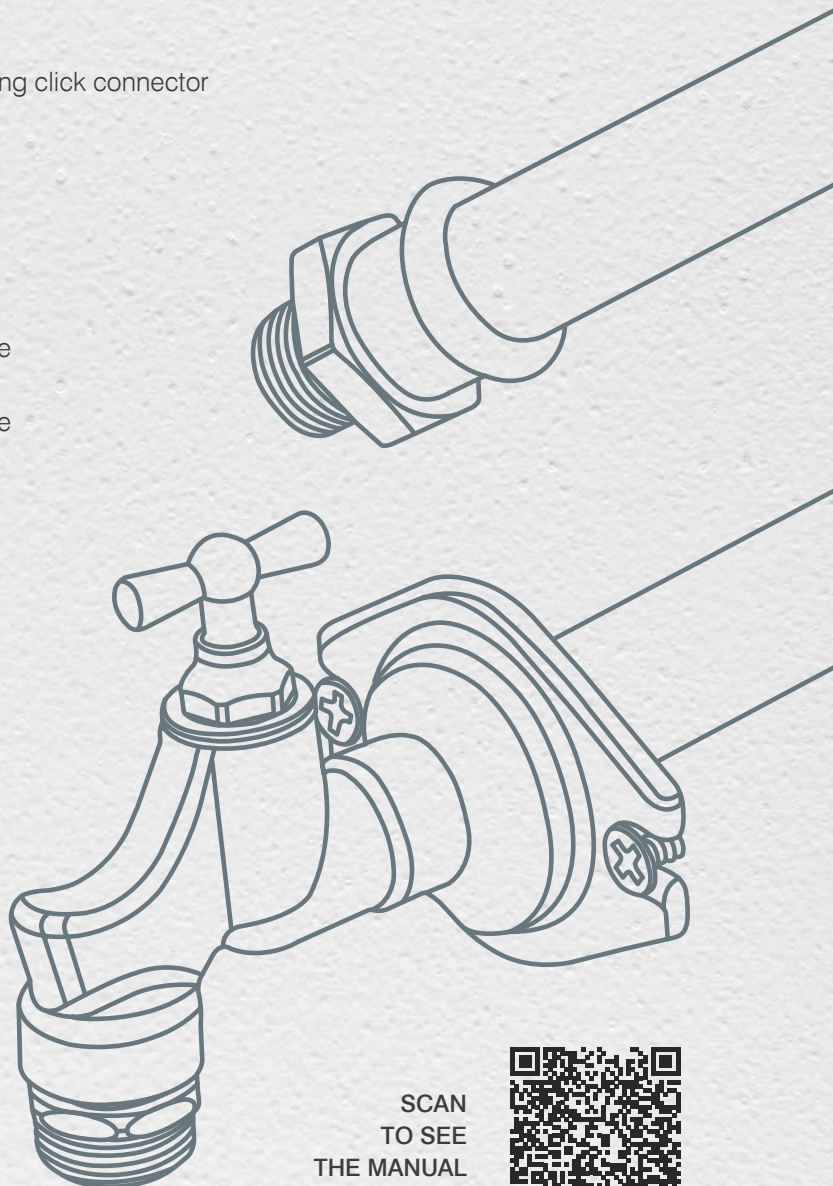

SCAN  
TO SEE  
THE MANUAL



EN 20/06

ISO 9001